

**// AX2GO IN BRIEF**

AX2Go is a mobile key for opening SimonsVoss digital locking components using Bluetooth Low Energy (BLE). If locking authorisations are stored in the app, the smartphone can be used like an access card or transponder. It's as simple as this: Unblock the smartphone, touch the locking device and open the door. The AX2Go app runs in the background and does not need to be launched.


**// ADVANTAGES OF THE KEY FUNCTION ON THE SMARTPHONE**

- ❑ You always carry your smartphone around with you and rarely forget it or lend it to someone
- ❑ Send access authorisations via cloud services without handing over keys in person
- ❑ Assign or revoke authorisations quickly
- ❑ High data security thanks to end-to-end encryption and display block
- ❑ Very user-friendly
- ❑ Resource-saving: uses existing devices and networks

**// FUNCTIONS**

- ❑ Multiple locking systems on one smartphone (up to 64,000 locks per locking system)
- ❑ Easy to set up, meaning the app is ready to use in less than a minute
- ❑ Clearly visible access status and quick solution assistance
- ❑ No registration or verification required

## // ISSUING OF AUTHORISATION

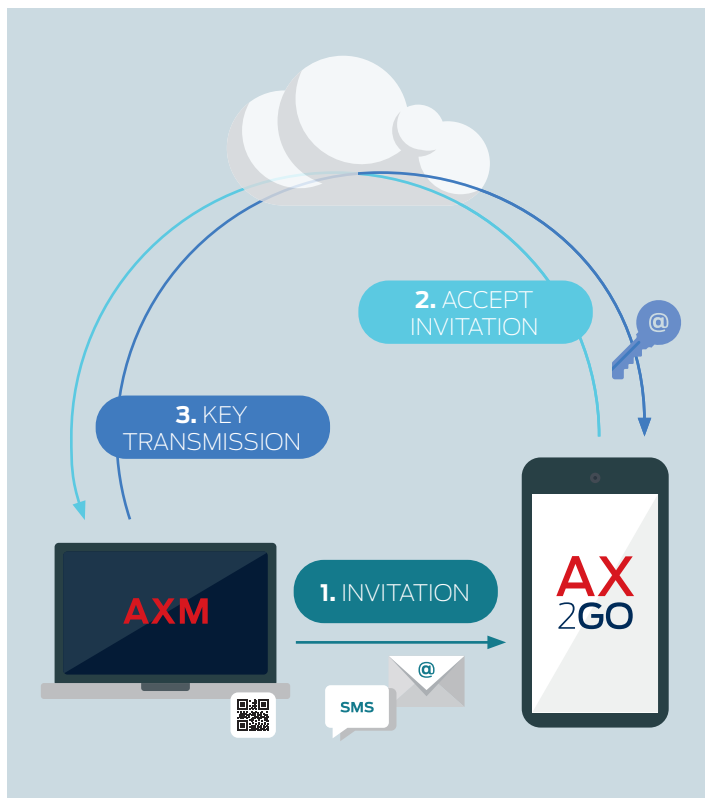

## // DOOR OPENING



## // SYSTEM REQUIREMENTS

### MANAGEMENT SOFTWARE

- ❑ Local administrator rights for installation
- ❑ Observe the system requirements for AX Manager/ Locking System Management software
- ❑ AXM Plus Version 1 and LSM Business/Professional Version 3.6 and higher

### SMARTPHONE

- ❑ Operating systems:  
the current and latest versions of iOS and Android are supported.
  - ❑ At least Android version 13 (2022)
  - ❑ At least iOS version 16 (2022)
- ❑ Bluetooth version 5.0 or higher
- ❑ Smartphone models:
  - ❑ Apple: iPhone 8 and higher
- ❑ No root access to the smartphone (maximum possible access rights); otherwise, security cannot be guaranteed.

### COMPATIBILITY

- ❑ All AX locking devices: Digital Cylinder AX, SmartHandle AX, SmartLocker AX  
In future also SmartHandle AX Advanced, SmartRelay AX Classic
- ❑ Firmware version 1.1.1147 and higher

Locking devices with an older firmware version must first be reset then patched using the SmartStick.AX. A simplified patch tool for AX locking devices is available for this purpose.

