




// FEATURES

- The smart card is used for identification in System 3060 to actuate digital locking cylinders, SmartHandles, SmartRelays and SmartLocker.
- **::** Manage up to 32,000 locking devices with a smart card and open doors and gates.
- MIFARE® Classic, MIFARE Plus® and MIFARE® DESFire® smart cards can be used in System 3060. This is particularly advantageous where a company already has cards which are used, for example, as a company ID or for recording time and attendance.

// THE SMART CARD IS USED FOR IDENTIFICATION AND ACTIVATION IN SYSTEM 3060:

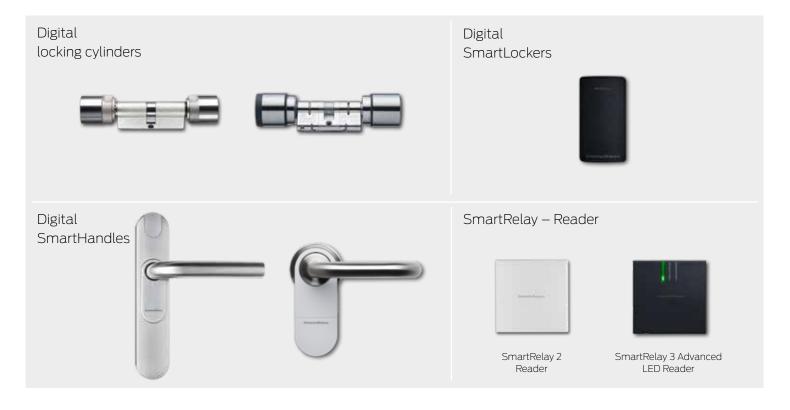

DIGITAL LOCKING CYLINDER

:: Hold the smart card directly in front of the cylinder thumb-turn.





- :: Wait for optical and audible release¹ or optical and/or audible release² by the locking cylinder.
- :: Then turn the digital locking cylinder thumb-turn in the direction of opening.
- : Open the door.

1) Digital locking cylinder 3061















DIGITAL SMART HANDLE 3062

:: Hold the the smart card in front of the SmartHandle 3062 reader unit.




- :: Wait for optical and audible release by the SmartHandle.
- :: Then press the door handle down.
- : Open the door.



DIGITAL SMART HANDLE AX

:: Hold the smart card in front of the SmartHandle AX reader unit.



- :: Wait for optical and/or audible release by the SmartHandle.
- :: Then press the door handle down.
- : Open the door.



DIGITAL SMART LOCKER AX

:: Hold the smart card within the SmartLocker AX reading range.



- :: Wait for SmartLocker to activate the optical and/or audible release.
- :: Open the locker door.



SMART RELAY - READER

:: Hold the smart card directly on the SmartRelay 2 or SmartRelay 3 Advanced Reader.





- :: Wait for the optical and audible release.
- :: A SmartRelay allows an electric strike to unlock a door or can be used to open a barrier, for example.







