



// FEATURES

- ❖ The smart tag is used for identification in System 3060 to actuate digital locking cylinders, SmartHandles, SmartRelays and SmartLocker.
- ❖ Manage up to 32,000 locking devices with a smart tag and open doors and gates.
- ❖ System 3060 can be used with MIFARE® Classic, MIFARE Plus® and MIFARE® DESFire® smart tags. This is particularly advantageous where a company already has tags for recording time and attendance.

// IN SYSTEM 3060, A SMART TAG IS USED FOR IDENTIFICATION AND ACTIVATES:

Digital locking cylinders



Digitale SmartLocker



Digital SmartHandles



SmartRelay – Reader




SmartRelay 2 Reader



SmartRelay 3 Advanced LED Reader

DIGITAL LOCKING CYLINDER

- Hold the smart tag directly in front of the cylinder knob.



- Wait for **optical and audible release¹** or **optical and / or audible release²** by the locking cylinder.
- Then **turn** the digital locking cylinder **thumb-turn** in the direction of opening.
- Open the door.

1) Digital locking cylinder 3061



2) Digital Cylinder AX



DIGITAL SMART HANDLE 3062

- Hold the smart tag in front of the SmartHandle 3062 reader unit.




- Wait for **optical and audible release** by the SmartHandle.
- Then **press** the **door handle down**.
- Open the door.



DIGITAL SMART HANDLE AX

- Hold the smart tag in front of the SmartHandle AX reader unit.

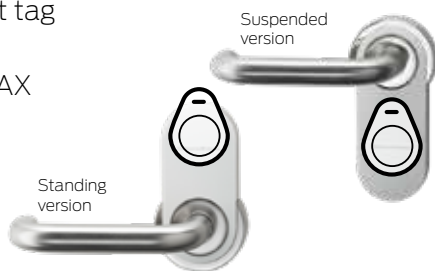

- Wait for **optical and / or audible release** by the SmartHandle.
- Then **press** the **door handle down**.
- Open the door.



DIGITAL SMART LOCKER AX

- Hold the smart tag within the SmartLocker AX read range.



- Wait for SmartLocker to activate the **optical and / or audible release**.
- Open the locker door.



SMART RELAY – READER

- Hold the smart tag directly on the SmartRelay 2 or SmartRelay 3 Advanced Reader.



- Wait for the **optical and audible release**.
- A **SmartRelay** allows an electric strike to unlock a door or can be used to open a barrier, for example.

