



// FEATURES

- ❖ The SlimTag is used for identification in System 3060 to operate locking cylinders, SmartHandles, SmartRelays and SmartLocker.
- ❖ Manage up to 32,000 locks and open doors and gates with a SlimTag.
- ❖ MIFARE® DESFire® SlimTags are used in System 3060. This is particularly advantageous when a company already has cards which are used as a company ID or for time-and-attendance recording, for example.

// IN SYSTEM 3060, THE SLIM TAG IS USED FOR IDENTIFICATION AND ACTIVATES:

Digital
locking cylinders



Digital
SmartLockers



Digital
SmartHandles



SmartRelay – Reader



SmartRelay 2
reader



SmartRelay 3 Advanced
LED reader

DIGITAL LOCKING CYLINDER

- Hold the SlimTag directly in front of the cylinder thumb-turn.



- Wait for **the visual and audible¹** or **visual and/or audible²** release by the locking cylinder.
- Then** turn the digital locking cylinder **thumb-turn** in the direction of opening.
- Open the door.

1) Digital Cylinder 3061



2) Digital Cylinder AX



DIGITAL SMART HANDLE 3062

- Hold the SlimTag in front of the SmartHandle 3062 reader unit.




- Wait for SmartHandle to activate the **optical and audible release.**
- Then** press the **door fitting.**
- Open the door.



DIGITAL SMART HANDLE AX

- Hold the SlimTag in front of the SmartHandle AX reader unit.

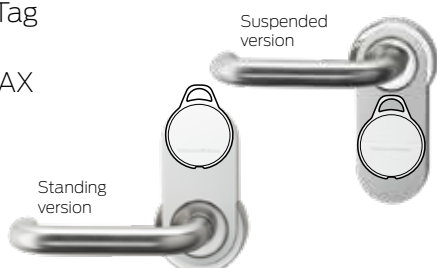

- Wait for **SmartHandle to activate optical and/or audible** release.
- Then** press the **door fitting.**
- Open the door.



DIGITAL SMART LOCKER AX

- Hold the Slim Tag within the SmartLocker AX read range.



- Wait for SmartLocker **to activate** the visual and/or audible release.
- Open the locker door.



SMART RELAY – READER

- Hold the SlimTag directly on the SmartRelay 2 or SmartRelay 3 Advanced reader.



- Wait for the **visual and audible release.**
- A **SmartRelay** allows an electric strike to unlock a door or can be used to open a barrier, for example.

